


室内灯具光度数据

实测参数: U:119.6V I:0.4123A P:49.15W PF:0.9965 实检光通:7144.9x1 lm		
灯具名称: 線光-50W	灯具类型: Linear Light	灯具重量: 1.4
灯具规格: LED-5000K-80CRI	外型尺寸: 1200*75*70	测试编号:
制造厂商: STEMOD	发光口面: 1185*75	保护角:

光源数据		光度数据			
型号	5000K-80CRI	峰值光强 (cd)	2152	S/MH (C0/180)	1.25
标称功率 (W)	50	灯具效率 (%)	100.0	S/MH (C90/270)	1.22
额定电源电压 (V)	120	总光通量 (lm)	7144.9	η UP, DN (C0-180)	4.8, 45.2
额定光通量 (lm)	7144.9	CIE分类	直接	η UP, DN (C180-360)	4.8, 45.2
灯具内光源数 (只)	1	上射光通比 (%)	9.6	CIBSE SHR NOM	1.25
实测电源电压 (V)	120	下射光通比 (%)	90.4	CIBSE SHR MAX	1.35

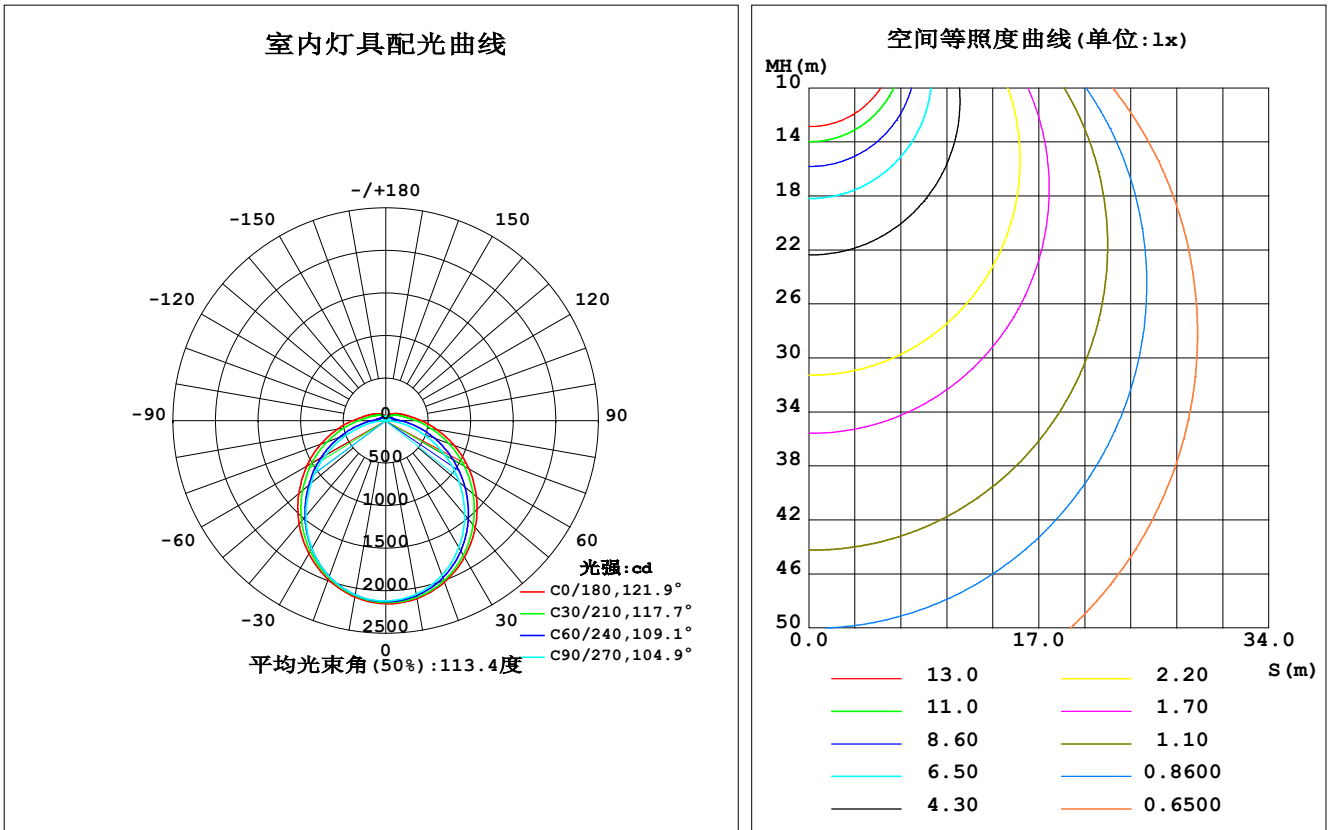

C角度范围: 0度 - 360度
C角度间隔: 15.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: ljj
测试日期: 2019-4-13

γ 角度范围: 0度 - 180度
 γ 角度间隔: 1.0度
测试系统: 远方(EVERFINE)GO-2000B_V1系统 V2.0.287
环境湿度: 65.0%
测试距离: 5.900米 [K=1.0000]
备注:

灯具环带光通量

环带光通量:

γ	C0	C45	C90	C135	C180	C225	C270	C315	$\gamma(^{\circ})$	Φ 环	Φ 总	%lum, lamp
10	2123	2100	2070	2059	2104	2081	2078	2084	0- 10	200.8	200.8	2.81,2.81
20	2019	1987	1934	1928	1985	1951	1949	1975	10- 20	573.3	774.2	10.8,10.8
30	1852	1802	1719	1731	1807	1752	1738	1793	20- 30	863.6	1638	22.9,22.9
40	1637	1562	1443	1487	1585	1502	1461	1553	30- 40	1035	2673	37.4,37.4
50	1391	1288	1128	1212	1335	1222	1145	1280	40- 50	1072	3745	52.4,52.4
60	1126	1009	797.1	936.3	1076	933.0	820.5	993.1	50- 60	987.7	4733	66.2,66.2
70	858.0	722.8	474.7	658.2	813.0	653.4	491.1	710.2	60- 70	806.8	5539	77.5,77.5
80	609.4	464.8	180.3	415.7	573.8	414.7	189.7	460.1	70- 80	569.9	6109	85.5,85.5
90	420.1	279.0	15.60	249.9	389.6	248.0	17.69	276.2	80- 90	347.1	6456	90.4,90.4
100	290.7	181.7	18.75	167.1	272.8	166.5	20.43	179.2	90-100	213.5	6670	93.3,93.3
110	216.4	135.2	22.77	125.2	205.4	125.1	24.38	126.1	100-110	148.8	6819	95.4,95.4
120	166.4	95.90	26.90	99.19	158.3	99.49	28.41	90.03	110-120	108.5	6927	97,97
130	130.0	73.17	30.75	81.89	124.2	82.93	32.20	75.23	120-130	78.72	7006	98.1,98.1
140	103.2	59.33	34.31	69.75	98.37	70.74	35.71	62.04	130-140	56.20	7062	98.8,98.8
150	82.21	50.48	39.31	60.47	77.76	61.35	40.05	53.20	140-150	38.83	7101	99.4,99.4
160	63.98	47.54	44.00	54.63	62.59	55.65	44.53	48.10	150-160	25.14	7126	99.7,99.7
170	55.00	48.41	47.74	50.82	52.34	51.09	48.08	48.54	160-170	14.31	7140	99.9,99.9
180	42.41	49.86	50.00	49.65	42.51	49.77	50.07	49.59	170-180	4.646	7145	100,100
单位:°	光强:cd								单位:lm			


C角度范围: 0度 - 360度
 C角度间隔: 15.0度
 测试速度: 快速
 环境温度: 25.3°C
 测试人员: ljj
 测试日期: 2019-4-13

γ 角度范围: 0度 - 180度
 γ 角度间隔: 1.0度
 测试系统: 远方(EVERFINE)GO-2000B_V1系统 V2.0.287
 环境湿度: 65.0%
 测试距离: 5.900米 [K=1.0000]
 备注:

工作面利用系数和灯具概算曲线

实测参数: U:119.6V I:0.4123A P:49.15W PF:0.9965 实检光通:7144.9x1 lm		
灯具名称: 線光-50W	灯具类型: Linear Light	灯具重量: 1.4
灯具规格: LED-5000K-80CRI	外型尺寸: 1200*75*70	测试编号:
制造厂商: STEMOD	发光口面: 1185*75	保护角:

顶棚	80%			70%			50%			30%			10%			0
墙面	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
地板	20%			20%			20%			20%			20%			0
室空间比	工作面利用系数															
0.0	1.17	1.17	1.17	1.13	1.13	1.13	1.06	1.06	1.06	.99	.99	.99	.93	.93	.93	.90
1.0	.00	.95	.91	.96	.92	.88	.90	.87	.84	.85	.82	.79	.80	.77	.75	.72
2.0	.86	.79	.73	.83	.77	.71	.78	.73	.68	.74	.69	.65	.69	.65	.62	.59
3.0	.75	.67	.60	.73	.65	.59	.69	.62	.57	.65	.59	.54	.61	.56	.52	.50
4.0	.67	.57	.51	.65	.56	.50	.61	.54	.48	.57	.51	.46	.54	.49	.45	.42
5.0	.59	.50	.43	.58	.49	.43	.54	.47	.41	.51	.45	.40	.49	.43	.39	.36
6.0	.53	.44	.38	.52	.43	.37	.49	.42	.36	.46	.40	.35	.44	.38	.34	.32
7.0	.48	.39	.33	.47	.39	.33	.45	.37	.32	.42	.36	.31	.40	.34	.30	.28
8.0	.44	.35	.30	.43	.35	.29	.41	.34	.28	.39	.32	.28	.37	.31	.27	.25
9.0	.40	.32	.27	.39	.32	.26	.38	.30	.26	.36	.29	.25	.34	.28	.24	.22
10.0	.37	.29	.24	.36	.29	.24	.35	.28	.23	.33	.27	.23	.32	.26	.22	.20

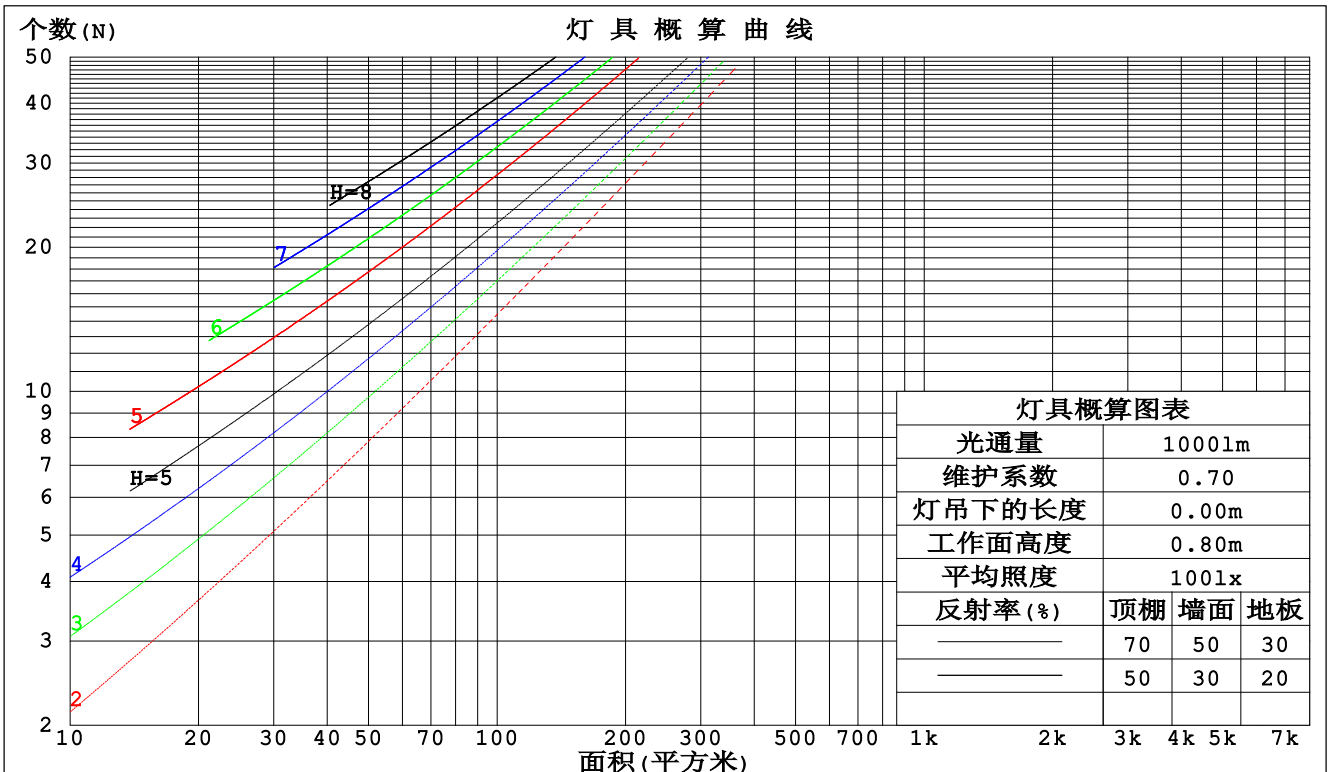

C角度范围: 0度 - 360度
 C角度间隔: 15.0度
 测试速度: 快速
 环境温度: 25.3℃
 测试人员: ljj
 测试日期: 2019-4-13

γ角度范围: 0度 - 180度
 γ角度间隔: 1.0度
 测试系统: 远方 (EVERFINE) GO-2000B_V1系统 V2.0.287
 环境湿度: 65.0%
 测试距离: 5.900米 [K=1.0000]
 备注:

墙面和天花板利用系数

实测参数: U:119.6V I:0.4123A P:49.15W PF:0.9965 实检光通:7144.9x1 lm		
灯具名称: 線光-50W	灯具类型: Linear Light	灯具重量: 1.4
灯具规格: LED-5000K-80CRI	外型尺寸: 1200*75*70	测试编号:
制造厂商: STEMOD	发光口面: 1185*75	保护角:

顶棚	80%			70%			50%			30%			10%			0
墙面	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
地板	20%			20%			20%			20%			20%			0
室空间比	墙壁面利用系数															
0.0																
1.0	.346	.197	.062	.336	.192	.061	.317	.182	.058	.299	.173	.055	.283	.164	.053	
2.0	.310	.170	.052	.301	.166	.051	.284	.158	.049	.268	.151	.047	.254	.144	.045	
3.0	.281	.149	.045	.273	.146	.044	.257	.139	.042	.243	.133	.041	.230	.127	.039	
4.0	.256	.133	.039	.248	.130	.038	.235	.124	.037	.222	.119	.036	.210	.114	.035	
5.0	.234	.119	.035	.228	.117	.034	.215	.112	.033	.204	.108	.032	.193	.103	.031	
6.0	.216	.108	.031	.210	.106	.031	.199	.102	.030	.189	.098	.029	.179	.094	.028	
7.0	.200	.099	.028	.195	.097	.028	.185	.093	.027	.175	.090	.026	.166	.086	.025	
8.0	.186	.091	.026	.182	.089	.025	.172	.086	.025	.164	.083	.024	.155	.080	.023	
9.0	.174	.084	.024	.170	.083	.023	.161	.080	.023	.153	.077	.022	.146	.074	.021	
10.0	.164	.078	.022	.159	.077	.021	.152	.074	.021	.144	.072	.020	.137	.069	.020	

顶棚	80%			70%			50%			30%			10%			0
墙面	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
地板	20%			20%			20%			20%			20%			0
室空间比	天花板利用系数															
0.0	.264	.264	.264	.226	.226	.226	.154	.154	.154	.088	.088	.088	.028	.028	.028	
1.0	.257	.230	.206	.220	.197	.177	.150	.136	.122	.087	.079	.071	.028	.025	.023	
2.0	.249	.206	.170	.213	.178	.147	.146	.123	.103	.084	.071	.060	.027	.023	.020	
3.0	.241	.189	.148	.207	.163	.128	.142	.113	.090	.082	.066	.053	.026	.022	.017	
4.0	.234	.176	.133	.201	.152	.115	.138	.106	.081	.080	.062	.048	.026	.020	.016	
5.0	.226	.166	.122	.194	.144	.106	.134	.101	.075	.077	.059	.044	.025	.019	.015	
6.0	.219	.158	.115	.188	.137	.100	.130	.096	.071	.075	.056	.042	.024	.018	.014	
7.0	.212	.151	.109	.182	.131	.095	.126	.092	.067	.073	.054	.040	.024	.018	.013	
8.0	.205	.146	.105	.177	.126	.091	.122	.089	.065	.071	.052	.039	.023	.017	.013	
9.0	.199	.141	.101	.172	.122	.088	.119	.086	.063	.069	.051	.037	.022	.017	.012	
10.0	.193	.137	.099	.167	.119	.086	.116	.083	.061	.067	.049	.037	.022	.016	.012	

C角度范围: 0度 - 360度
C角度间隔: 15.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: ljz
测试日期: 2019-4-13

γ角度范围: 0度 - 180度
γ角度间隔: 1.0度
测试系统: 远方(EVERFINE)GO-2000B_V1系统 V2.0.287
环境湿度: 65.0%
测试距离: 5.900米 [K=1.0000]
备注:

UGR(Unified Glare Rating)数据表

实测参数: U:119.6V I:0.4123A P:49.15W PF:0.9965 实检光通:7144.9x1 lm										
灯具名称: 線光-50W			灯具类型: Linear Light				灯具重量: 1.4			
灯具规格: LED-5000K-80CRI			外型尺寸: 1200*75*70				测试编号:			
制造厂商: STEMOD			发光口面: 1185*75				保护角:			
反射比: 天花板	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
墙面	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
工作面	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
房间尺寸	交叉(Viewed crosswise)					向前(Viewed endwise)				
x = 2H y = 2H	23.5	24.9	23.9	25.3	25.7	22.1	23.5	22.5	23.9	24.3
3H	25.6	26.9	26.0	27.3	27.8	23.5	24.8	23.9	25.2	25.6
4H	26.7	28.0	27.2	28.4	28.8	24.0	25.2	24.4	25.7	26.1
6H	27.9	29.0	28.3	29.5	30.0	24.3	25.5	24.8	25.9	26.4
8H	28.5	29.6	29.0	30.1	30.6	24.4	25.6	24.9	26.0	26.5
12H	29.2	30.3	29.7	30.8	31.3	24.5	25.5	24.9	26.0	26.5
4H 2H	24.0	25.3	24.5	25.7	26.1	23.0	24.2	23.4	24.7	25.1
3H	26.4	27.5	26.9	27.9	28.4	24.6	25.7	25.1	26.1	26.6
4H	27.7	28.7	28.2	29.2	29.7	25.2	26.3	25.8	26.7	27.3
6H	29.0	29.9	29.6	30.5	31.0	25.7	26.6	26.3	27.2	27.7
8H	29.8	30.6	30.3	31.2	31.7	25.9	26.7	26.4	27.3	27.8
12H	30.6	31.4	31.2	32.0	32.6	26.0	26.7	26.5	27.3	27.9
8H 4H	28.0	28.8	28.5	29.3	29.9	25.9	26.8	26.5	27.3	27.9
6H	29.6	30.3	30.2	30.9	31.5	26.7	27.4	27.3	28.0	28.6
8H	30.5	31.2	31.1	31.8	32.4	27.0	27.6	27.6	28.2	28.9
12H	31.6	32.2	32.3	32.8	33.5	27.2	27.8	27.8	28.4	29.1
12H 4H	28.0	28.7	28.5	29.3	29.9	26.1	26.9	26.7	27.4	28.0
6H	29.7	30.3	30.3	30.9	31.6	27.1	27.7	27.7	28.3	28.9
8H	30.7	31.3	31.4	31.9	32.6	27.5	28.0	28.1	28.6	29.3
不同间隔布灯时, 观察者位置引起的UGR变化:										
S = 1.0H	+ 0.1 / - 0.1					+ 0.1 / - 0.2				
1.5H	+ 0.2 / - 0.3					+ 0.2 / - 0.3				
2.0H	+ 0.2 / - 0.4					+ 0.2 / - 0.4				

依据CIE Pub.117计算, 表格已按7145lm光源光通进行修正 ($81\log(F/F_0) = 6.8$).

C角度范围: 0度 - 360度
 C角度间隔: 15.0度
 测试速度: 快速
 环境温度: 25.3℃
 测试人员: ljj
 测试日期: 2019-4-13

γ角度范围: 0度 - 180度
 γ角度间隔: 1.0度
 测试系统: 远方(EVERFINE)GO-2000B_V1系统 V2.0.287
 环境湿度: 65.0%
 测试距离: 5.900米 [K=1.0000]
 备注:

UF利用系数表

实测参数: U:119.6V I:0.4123A P:49.15W PF:0.9965 实检光通:7144.9x1 lm		
灯具名称: 線光-50W	灯具类型: Linear Light	灯具重量: 1.4
灯具规格: LED-5000K-80CRI	外型尺寸: 1200*75*70	测试编号:
制造厂商: STEMOD	发光口面: 1185*75	保护角:

反 射 比 / REFLECTANCE										
天花板	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
墙壁	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
工作面	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
室形指数	利用系数 UTILIZATION FACTORS (%) $k(RI) \times RCR = 5$									
k = 0.60	53	41	34	52	41	34	51	40	34	27
0.80	63	50	43	61	50	43	59	49	42	34
1.00	71	59	51	69	58	51	66	59	50	42
1.25	78	66	58	76	65	58	72	63	56	48
1.50	83	72	64	80	70	63	76	68	61	52
2.00	90	80	72	87	78	71	82	75	69	59
2.50	94	85	78	91	83	76	86	79	74	63
3.00	97	89	83	94	87	81	89	83	78	67
4.00	101	95	89	98	92	87	92	88	83	72
5.00	104	98	93	101	96	91	95	91	87	74
ROOM INDEX	UF (总)									UF (直接)
依据标准文件 DIN EN 13032-2 2004			悬挂灯			安装距高比 SHR NOM = 1.25				

C角度范围: 0度 - 360度
 C角度间隔: 15.0度
 测试速度: 快速
 环境温度: 25.3℃
 测试人员: ljlz
 测试日期: 2019-4-13

γ角度范围: 0度 - 180度
 γ角度间隔: 1.0度
 测试系统: 远方 (EVERFINE) GO-2000B_V1系统 V2.0.287
 环境湿度: 65.0%
 测试距离: 5.900米 [K=1.0000]
 备注:

灯具等光强曲线

实测参数: U:119.6V I:0.4123A P:49.15W PF:0.9965 实检光通:7144.9x1 lm		
灯具名称: 線光-50W	灯具类型: Linear Light	灯具重量: 1.4
灯具规格: LED-5000K-80CRI	外型尺寸: 1200*75*70	测试编号:
制造厂商: STEMOD	发光口面: 1185*75	保护角:

锥面光通量(90度):

3212.2 lm

%lum = 45.0%


%lamp = 45.0%

锥面光通量(120度):

4732.5 lm

%lum = 66.2%

%lamp = 66.2%

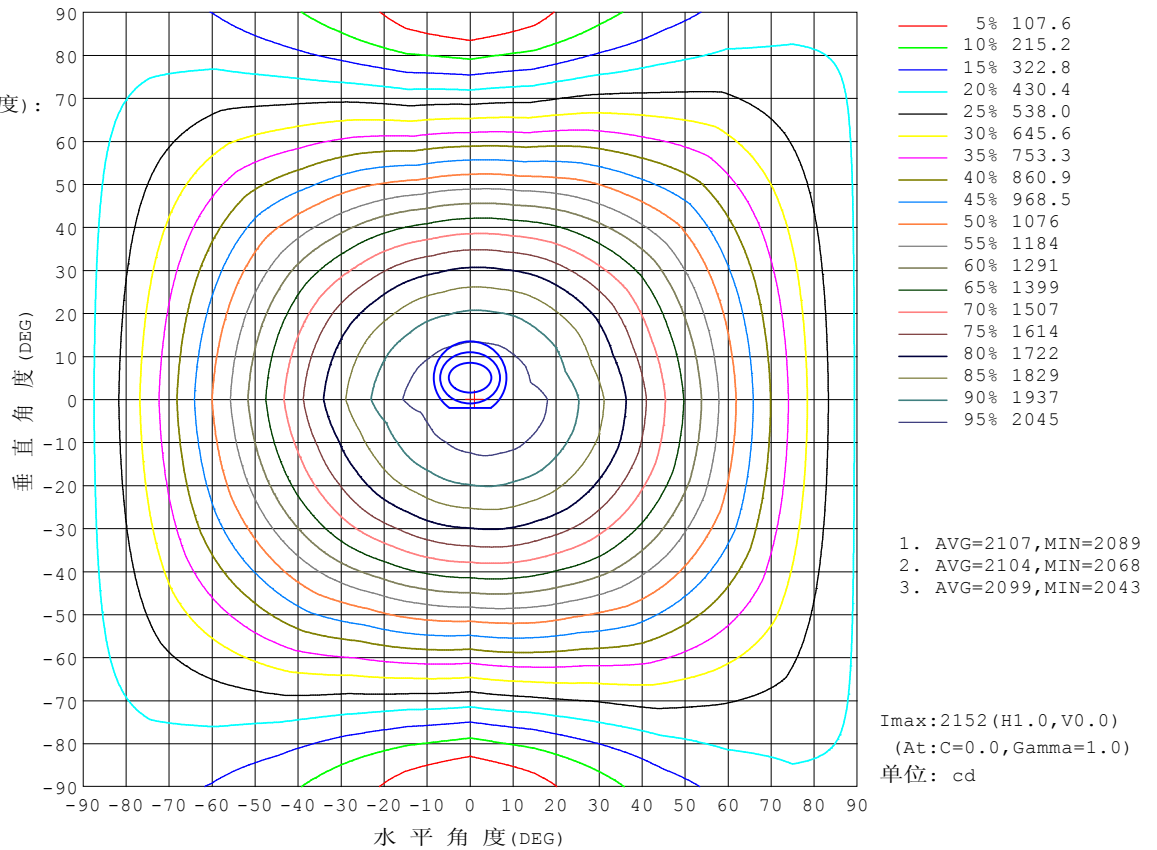

C角度范围: 0度 - 360度

C角度间隔: 15.0度

测试速度: 快速

环境温度: 25.3°C

测试人员: ljz

测试日期: 2019-4-13

γ角度范围: 0度 - 180度

γ角度间隔: 1.0度

测试系统: 远方(EVERFINE)GO-2000B_V1系统 V2.0.287


环境湿度: 65.0%

测试距离: 5.900米 [K=1.0000]

备注:

灯具有效平均照度图

实测参数: U:119.6V I:0.4123A P:49.15W PF:0.9965 实检光通:7144.9x1 lm		
灯具名称: 線光-50W	灯具类型: Linear Light	灯具重量: 1.4
灯具规格: LED-5000K-80CRI	外型尺寸: 1200*75*70	测试编号:
制造厂商: STEMOD	发光口面: 1185*75	保护角:

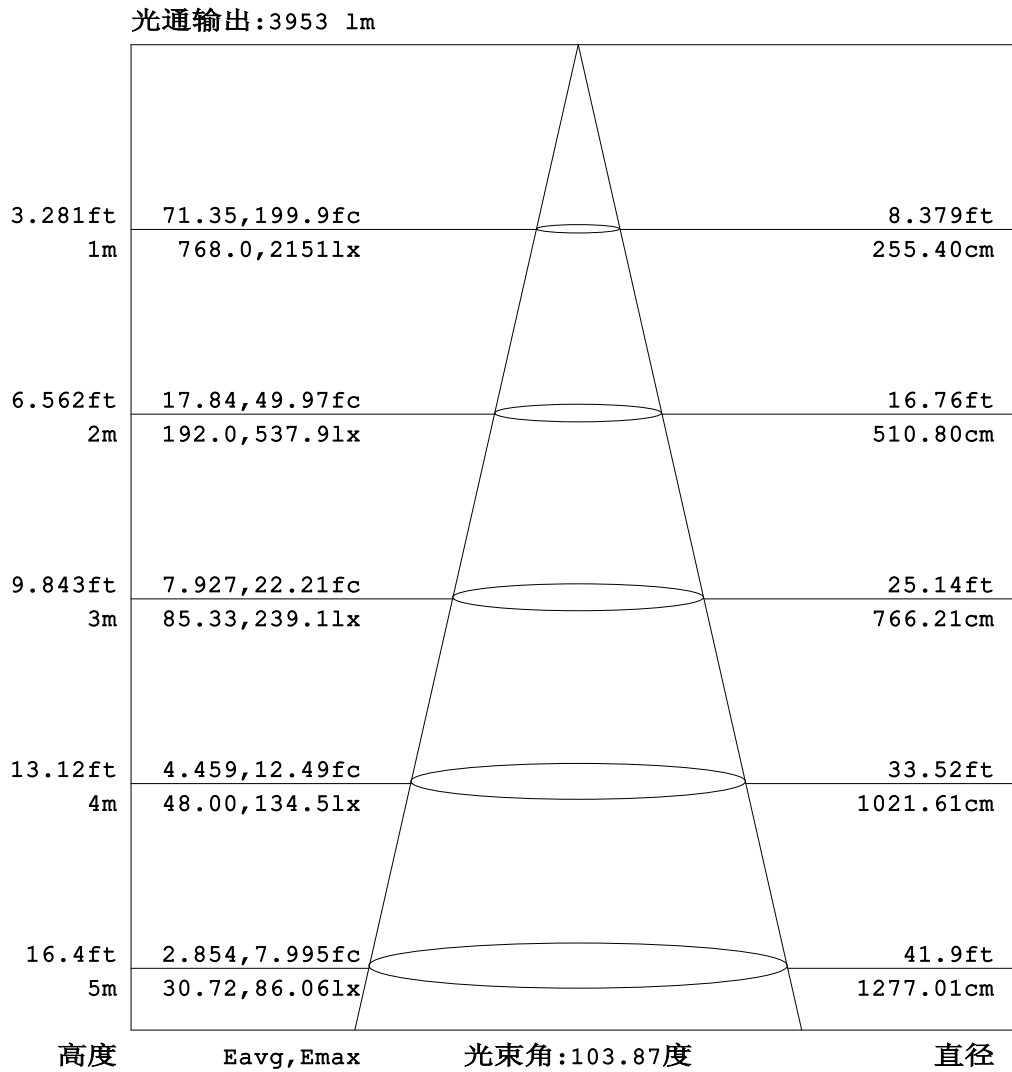


注: 曲线为灯具在不同投射距离下的照射区域及区域内平均照度。

C角度范围: 0度 - 360度
C角度间隔: 15.0度
测试速度: 快速
环境温度: 25.3℃
测试人员: ljz
测试日期: 2019-4-13

γ角度范围: 0度 - 180度
γ角度间隔: 1.0度
测试系统: 远方 (EVERFINE) GO-2000B_V1系统 V2.0.287
环境湿度: 65.0%
测试距离: 5.900米 [K=1.0000]
备注:

平面等照度曲线


实测参数: U:119.6V I:0.4123A P:49.15W PF:0.9965 实检光通:7144.9x1 lm		
灯具名称: 線光-50W	灯具类型: Linear Light	灯具重量: 1.4
灯具规格: LED-5000K-80CRI	外型尺寸: 1200*75*70	测试编号:
制造厂商: STEMOD	发光口面: 1185*75	保护角:

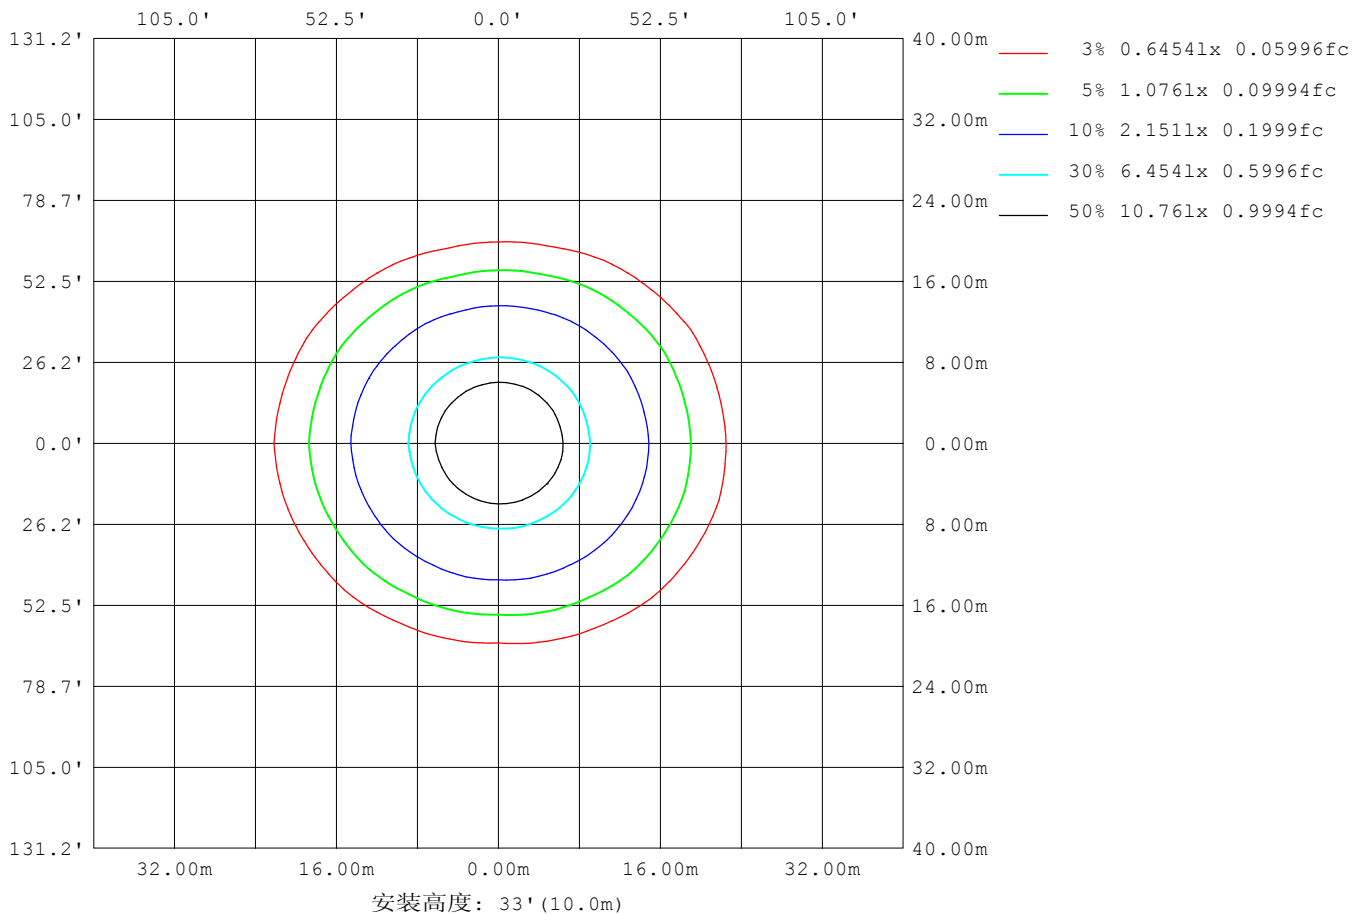

C角度范围: 0度 - 360度
C角度间隔: 15.0度
测试速度: 快速
环境温度: 25.3°C
测试人员: ljlz
测试日期: 2019-4-13

γ角度范围: 0度 - 180度
γ角度间隔: 1.0度
测试系统: 远方 (EVERFINE) GO-2000B_V1系统 V2.0.287
环境湿度: 65.0%
测试距离: 5.900米 [K=1.0000]
备注:

平面照度曲线

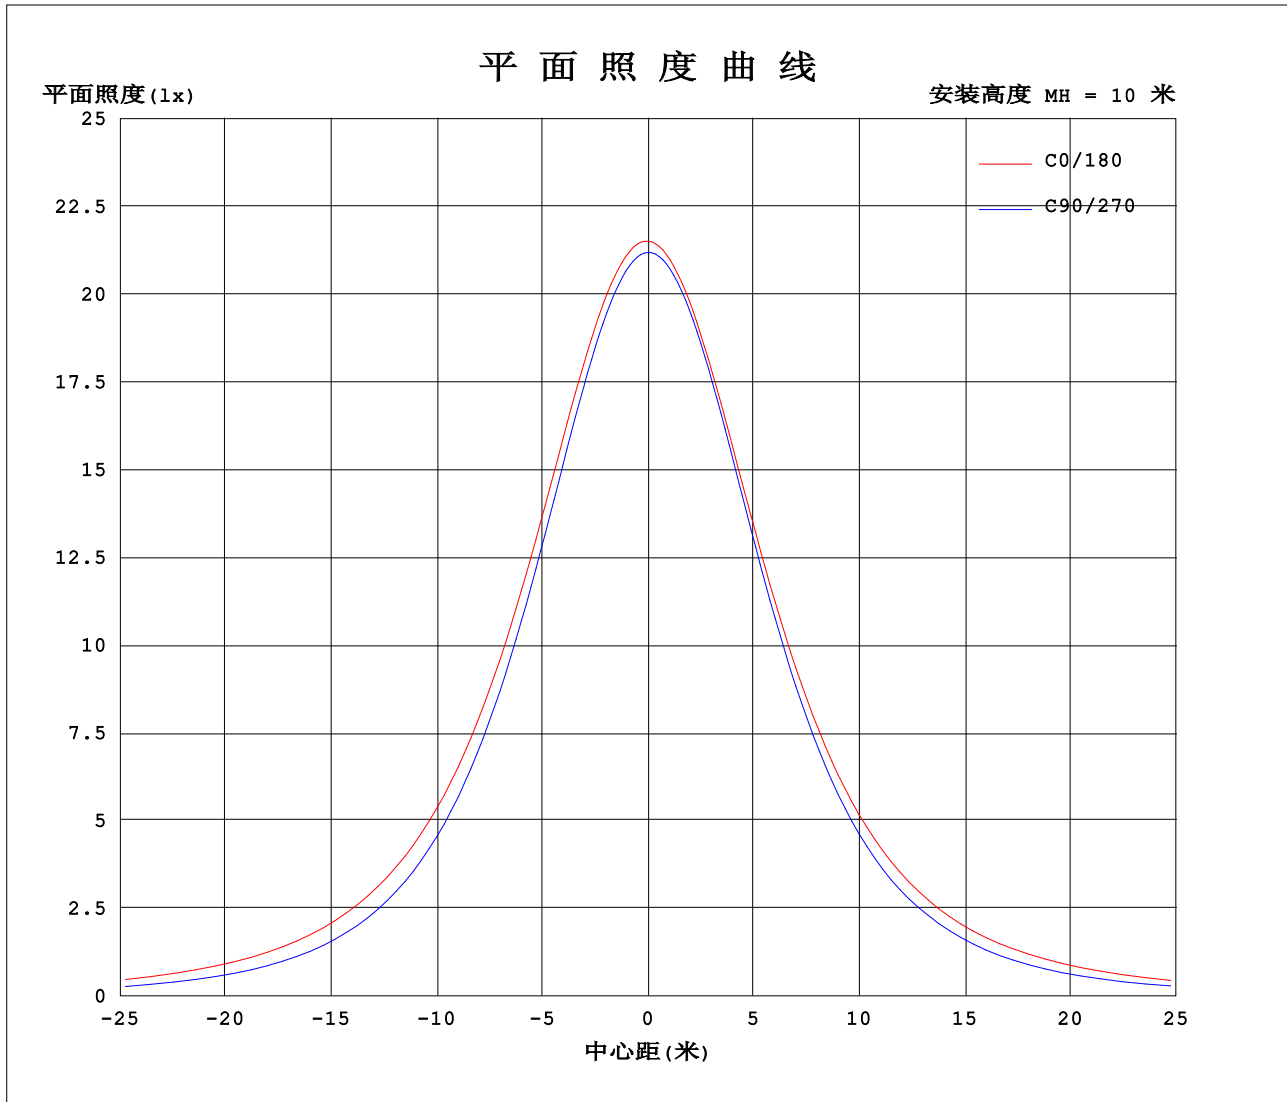

C角度范围: 0度 - 360度
C角度间隔: 15.0度
测试速度: 快速
环境温度: 25.3°C
测试人员: ljlz
测试日期: 2019-4-13

Y角度范围: 0度 - 180度
Y角度间隔: 1.0度
测试系统: 远方 (EVERFINE) GO-2000B_V1系统 V2.0.287
环境湿度: 65.0%
测试距离: 5.900米 [K=1.0000]
备注:

光强分布数据表格

实测参数: U:119.6V I:0.4123A P:49.15W PF:0.9965 实检光通:7144.9x1 lm		
灯具名称: 線光-50W	灯具类型: Linear Light	灯具重量: 1.4
灯具规格: LED-5000K-80CRI	外型尺寸: 1200*75*70	测试编号:
制造厂商: STEMOD	发光口面: 1185*75	保护角:

表--1

单位: cd

C (DEG) \ γ (DEG)	0	15	30	45	60	75	90	105	120	135	150	165	180	195	210	225	240	255	270
0	2151	2144	2137	2131	2127	2122	2119	2117	2114	2113	2110	2109	2151	2144	2137	2131	2127	2122	2119
5	2147	2141	2133	2126	2118	2113	2106	2102	2097	2096	2093	2094	2137	2129	2123	2117	2114	2110	2110
10	2123	2117	2108	2100	2088	2080	2070	2065	2059	2059	2057	2059	2104	2094	2088	2081	2079	2075	2078
15	2079	2075	2063	2053	2037	2027	2013	2008	2001	2003	2002	2008	2052	2041	2034	2025	2023	2019	2024
20	2019	2015	2000	1987	1965	1952	1934	1929	1922	1928	1930	1940	1985	1972	1964	1951	1948	1942	1949
25	1942	1938	1920	1902	1875	1857	1835	1831	1826	1838	1843	1858	1902	1888	1876	1860	1852	1844	1852
30	1852	1847	1825	1802	1767	1745	1719	1717	1715	1731	1743	1763	1807	1791	1776	1752	1741	1728	1738
35	1749	1744	1717	1688	1644	1617	1588	1587	1589	1615	1632	1658	1701	1682	1663	1632	1616	1596	1607
40	1637	1631	1599	1562	1510	1476	1443	1445	1453	1487	1511	1542	1585	1563	1540	1502	1478	1452	1461
45	1517	1510	1472	1429	1366	1326	1289	1295	1309	1353	1384	1420	1463	1438	1411	1364	1332	1300	1307
50	1391	1383	1340	1288	1217	1167	1128	1137	1161	1212	1252	1292	1335	1308	1276	1222	1181	1141	1145
55	1261	1251	1204	1145	1063	1015	963	986	1009	1076	1116	1162	1203	1175	1139	1078	1038	979	989
60	1126	1117	1065	1009	910	851	797	824	858	936	980	1039	1076	1040	1009	933	883	818	820
65	992	990	927	864	759	689	634	664	710	794	846	907	945	906	871	791	732	659	654
70	858	855	792	723	613	532	475	510	568	658	716	777	813	775	737	653	586	504	491
75	728	725	662	588	476	383	323	364	439	530	593	654	688	651	610	523	449	362	334
80	609	604	541	465	352	248	180	234	319	416	485	543	574	539	496	415	327	231	190
85	504	498	443	361	248	139	66.6	131	225	322	393	446	473	447	399	320	229	128	71.8
90	420	408	357	279	175	72.9	15.6	71.9	161	250	318	365	390	366	321	248	163	71.5	17.7
95	347	336	290	221	132	51.2	16.8	52.1	124	200	260	302	323	303	263	199	125	52.6	18.7
100	291	280	241	182	109	44.4	18.7	44.6	103	167	218	254	273	255	221	166	104	45.2	20.4
105	249	239	206	156	93.8	41.9	20.7	41.6	89.0	144	189	219	235	221	191	143	88.8	42.3	22.4
110	216	208	179	135	82.0	40.7	22.8	40.4	79.2	125	164	191	205	193	166	125	79.1	41.2	24.4
115	189	182	157	113	70.9	38.8	24.9	40.0	72.5	111	144	167	180	169	146	111	72.4	40.8	26.4
120	166	160	136	95.9	63.3	37.9	26.9	40.0	67.4	99.2	127	147	158	149	129	99.5	67.4	40.7	28.4
125	147	141	116	83.1	57.4	37.4	28.9	40.3	63.5	89.4	114	130	140	132	115	90.5	63.5	40.9	30.3
130	130	125	97.4	73.2	53.1	37.2	30.7	40.7	60.2	81.9	102	116	124	117	103	82.9	60.3	41.3	32.2
135	116	107	84.5	65.5	49.5	37.3	32.5	41.6	57.5	75.4	92.3	104	111	105	92.4	76.4	57.7	42.5	34.0
140	103	97.6	73.8	59.3	47.0	38.0	34.3	42.9	55.2	69.8	83.6	92.0	98.4	93.7	83.7	70.7	55.3	43.5	35.7
145	92.1	83.0	65.4	54.4	45.1	39.4	36.8	43.9	53.2	64.8	75.8	82.5	87.1	84.0	76.1	65.7	53.3	44.4	37.7
150	82.2	69.6	58.4	50.5	44.9	41.2	39.3	44.5	51.0	60.5	69.1	74.0	77.8	75.3	69.3	61.4	51.6	44.8	40.1
155	73.6	60.0	52.7	48.1	45.1	43.1	41.7	45.2	51.3	56.6	63.1	66.6	69.6	67.8	63.3	57.5	51.8	45.6	42.4
160	64.0	53.0	48.3	47.5	46.7	44.8	44.0	46.3	50.7	54.6	57.9	60.2	62.6	61.2	58.1	55.6	51.3	46.7	44.5
165	58.9	47.6	45.8	48.2	47.5	46.5	46.0	47.4	49.7	52.9	55.3	55.7	56.7	56.9	55.5	53.8	50.1	47.7	46.4
170	55.0	45.2	46.8	48.4	48.3	48.0	47.7	48.3	49.5	50.8	51.9	52.4	52.3	53.1	52.5	51.1	49.9	48.5	48.1
175	43.7	44.2	47.6	48.9	49.2	49.2	49.1	49.2	49.5	49.8	49.8	47.7	43.2	49.0	50.2	50.1	49.9	49.4	49.3
180	42.4	46.6	49.0	49.9	50.0	50.1	50.0	50.0	49.9	49.6	48.8	45.7	42.5	46.5	49.1	49.8	50.1	50.1	50.1

C角度范围: 0度 - 360度

C角度间隔: 15.0度

测试速度: 快速

环境温度: 25.3℃

测试人员: ljz

测试日期: 2019-4-13

γ角度范围: 0度 - 180度

γ角度间隔: 1.0度

测试系统: 远方(EVERFINE)GO-2000B_V1系统 V2.0.287

环境湿度: 65.0%

测试距离: 5.900米 [K=1.0000]

备注:

光强分布数据表格

实测参数: U:119.6V I:0.4123A P:49.15W PF:0.9965 实检光通:7144.9x1 lm		
灯具名称: 線光-50W	灯具类型: Linear Light	灯具重量: 1.4
灯具规格: LED-5000K-80CRI	外型尺寸: 1200*75*70	测试编号:
制造厂商: STEMOD	发光口面: 1185*75	保护角:

表--2

单位: cd

C (DEG) \ γ (DEG)	285	300	315	330	345															
0	2117	2114	2113	2110	2109															
5	2109	2110	2109	2108	2105															
10	2079	2084	2084	2086	2082															
15	2027	2036	2039	2044	2040															
20	1954	1968	1975	1984	1981															
25	1860	1880	1892	1907	1906															
30	1747	1775	1793	1814	1816															
35	1619	1654	1679	1708	1714															
40	1477	1519	1553	1592	1603															
45	1325	1376	1420	1467	1482															
50	1166	1227	1280	1336	1357															
55	1005	1080	1137	1202	1227															
60	843	930	993	1071	1094															
65	683	778	850	936	961															
70	527	630	710	799	829															
75	384	490	577	669	701															
80	248	362	460	549	584															
85	140	256	358	444	483															
90	75.8	180	276	356	398															
95	50.8	133	217	288	327															
100	45.0	105	179	238	273															
105	43.4	87.6	153	205	233															
110	42.3	80.4	126	178	204															
115	41.1	71.7	109	155	178															
120	40.1	65.2	90.0	136	157															
125	39.7	59.5	80.1	116	138															
130	39.5	55.7	75.2	99.1	122															
135	39.4	52.6	67.8	81.0	109															
140	39.5	49.9	62.0	69.8	97.3															
145	40.8	47.8	57.6	61.3	84.0															
150	42.2	46.4	53.2	53.4	70.9															
155	43.8	46.0	49.5	53.6	59.8															
160	45.4	47.3	48.1	49.8	53.1															
165	46.9	47.9	48.5	46.6	47.4															
170	48.3	48.6	48.5	47.0	45.1															
175	49.3	49.3	48.9	47.7	43.5															
180	50.0	50.0	49.6	48.9	45.6															

C角度范围: 0度 - 360度

C角度间隔: 15.0度

测试速度: 快速

环境温度: 25.3°C

测试人员: ljj

测试日期: 2019-4-13

γ角度范围: 0度 - 180度

γ角度间隔: 1.0度

测试系统: 远方(EVERFINE)GO-2000B_V1系统 V2.0.287

环境湿度: 65.0%

测试距离: 5.900米 [K=1.0000]

备注: